

垂直式 Vertical



GH-13005 THRU GH-13008

WEIGHT(重量) : 56g

HOLDING CAPACITY(夹持力) : 68kg

SPINDLE SUPPLIED(压头螺丝型号) :

M4×28


BAR OPENS(压把开启角度) : 90°

HANDLE OPENS

(手柄开启角度) : 170°



GH-13005

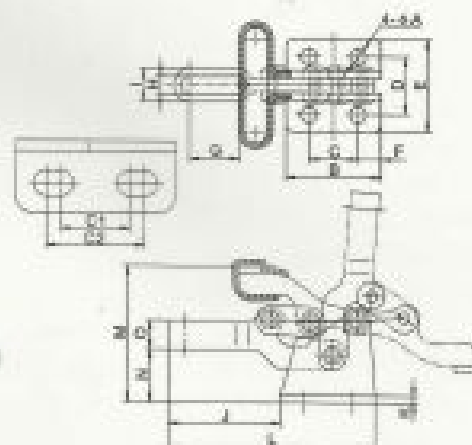

MODEL	WEIGHT	HOLDING CAPACITY	SPINDLE SUPPLIED	BAR OPENS	HANDLE OPENS	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O		
GH-13005	60	68	GH-FC-10128	90°	170°	4.4	26.2	11.5	-	-	16.9	26.4	6.4	12.7	5.0	9	30.8	2	57	15.2	12.7	7.6
GH-13007	133	150	GH-FC-50212	90°	170°	7	46	-	38	37	29.4	46	18.3	19.5	8.7	14.7	58.5	3	99.7	18.7	22.2	12.7
GH-13008	199	220	GH-FC-20212	90°	170°	7.9	64.3	-	21	29	38.1	62.7	12.7	28.9	10.4	18.4	70.5	3	135	60.3	33.3	19
GH-13005-SS	STAINLESS STEEL																					
GH-13007-SS	STAINLESS STEEL																					

GH-13009 THRU GH-14009

WEIGHT(重量) : 42g

HOLDING CAPACITY(夹持力) : 30kg

SPINDLE SUPPLIED(压头螺丝型号) :

M4×40


BAR OPENS(压把开启角度) : 60°

HANDLE OPENS

(手柄开启角度) : 88°



GH-13009

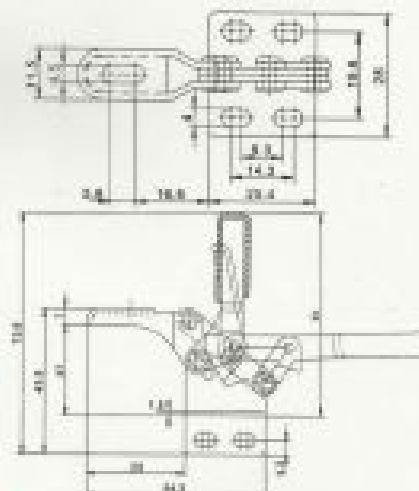

MODEL	DESCRIPTION
GH-13009	FLANGED BASE
GH-14009	STRAIGHT BASE

GH-101-A THRU GH-101-AI

WEIGHT(重量) : 71g


HOLDING CAPACITY(夹持力) : 50kg

SPINDLE SUPPLIED(压头螺丝型号) :

M5×40

BAR OPENS(压把开启角度) : 100°



HANDLE OPENS(手柄开启角度) : 56°

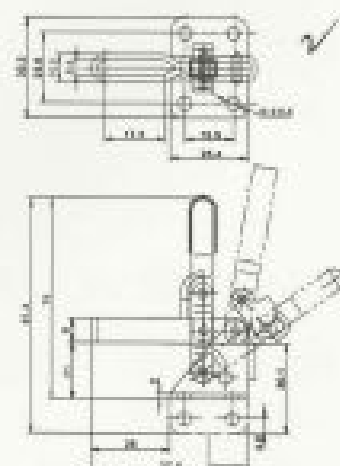



MODEL	DESCRIPTION
GH-101-A	U-BAR, FLANGED BASE, STRAIGHT HANDLE
GH-101-AE	U-BAR, STRAIGHT BASE, STRAIGHT HANDLE
GH-101-AIT	U-BAR, STRAIGHT BASE, T-HANDLE
GH-101-AT	U-BAR, FLANGED BASE, T-HANDLE
GH-101-ASS	STAINLESS STEEL



WEIGHT(自重): 115g
HOLDING CAPACITY(握持力): 100kg
SPINDLE SUPPLIED(压头螺柱型号):
M6×45
BAR OPENS(压把开启角度): 90°
HANDLE OPENS(手柄开启角度): 63°

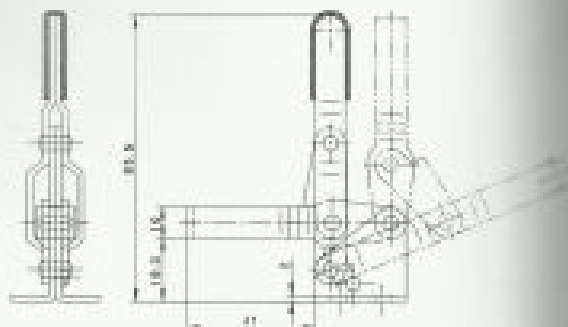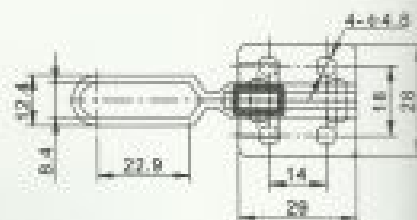

WEIGHT(自重): 13kg
HOLDING CAPACITY(支持力): 91kg
SPINDLE SUPPLIED(压头螺旋型号):
M5x40
BAR OPENS(压把开启角度): 100°
HANDLE OPENS(手柄开启角度): 60°

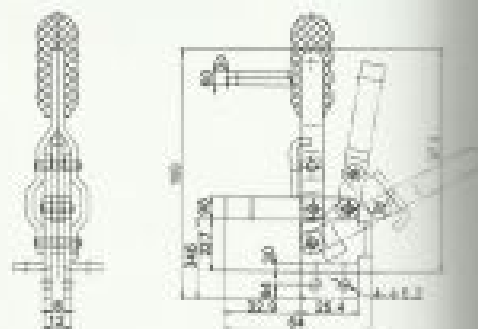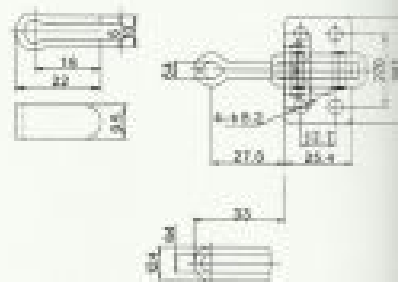02

垂直式 Vertical

**GH-101-B**

WEIGHT(自重): 135.4g


HOLDING CAPACITY(夹持力): 100kg

SPINDLE SUPPLIED(压头螺栓型号):

M6×45

BAR OPENS(压把开启角度): 90°

HANDLE OPENS(手柄开启角度): 65°

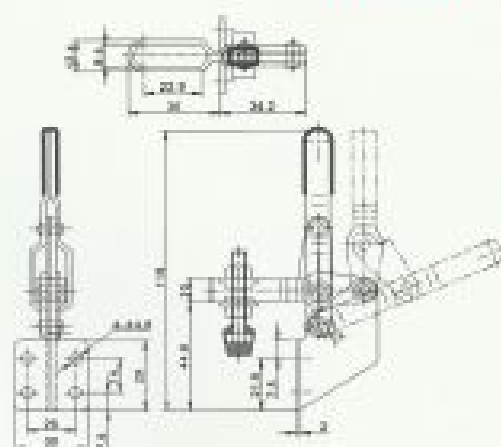**GH-101-DL**

WEIGHT(自重): 350g


HOLDING CAPACITY(夹持力): 180kg

SPINDLE SUPPLIED(压头螺栓型号):

M8×60

BAR OPENS(压把开启角度): 90°

HANDLE OPENS(手柄开启角度): 65°

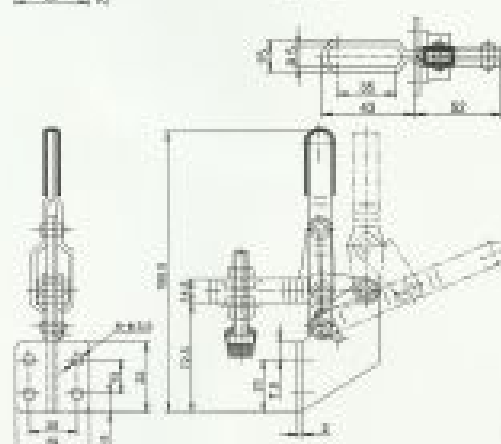**GH-101-D AND GH-101-E
GH-101-DI AND GH-101-EI**

HOLDING CAPACITY(夹持力): 180kg

SPINDLE SUPPLIED(压头螺栓型号):

M8×70

BAR OPENS(压把开启角度): 100°


HANDLE OPENS(手柄开启角度): 60°



GH-101-D



GH-101-E

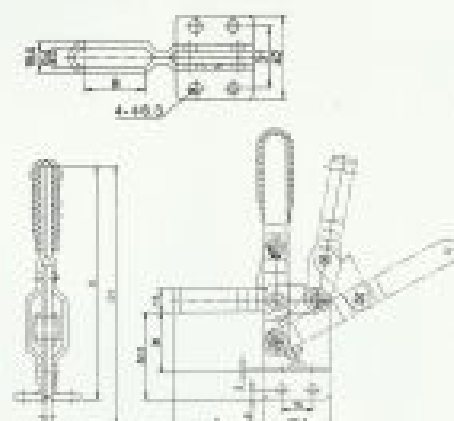

MODEL	DESCRIPTION	WEIGHTg	A	B	C	C1
GH-101-D	U-BAR, FLANGED BASE, STRAIGHT HANDLE	205g	54	12.7	145	-
GH-101-D-15	LONGU-BAR, FLANGED BASE, STRAIGHT HANDLE	485g	154	132.7	145	-
GH-101-DI	U-BAR, STRAIGHT BASE, STRAIGHT HANDLE	205g	54	12.7	-	159
GH-101-DI-15	LONGU-BAR, STRAIGHT BASE, STRAIGHT HANDLE	485g	154	132.7	-	159
GH-101-E	LONGU-BAR, FLANGED BASE, STRAIGHT HANDLE	355g	104	82.7	145	-
GH-101-E-20	LONGU-BAR, FLANGED BASE, STRAIGHT HANDLE	435g	204	182.7	145	-
GH-101-EI	LONGU-BAR, STRAIGHT BASE, STRAIGHT HANDLE	355g	104	82.7	-	159
GH-101-EI-20	LONGU-BAR, STRAIGHT BASE, STRAIGHT HANDLE	435g	204	182.7	-	159

GH-11421 AND GH-12421

WEIGHT(重量): 370g

HOLDING CAPACITY(夹持力): 200kg

SPINDLE SUPPLIED(压头螺丝型号):

M8×50


BAR OPENS(压把开启角度): 94°

HANDLE OPENS(手柄开启角度): 45°



GH-11421

MODEL	DESCRIPTION
GH-11421	FLANGED BASE
GH-12421	STRAIGHT BASE
GH-11421-SI	STAINLESS STEEL

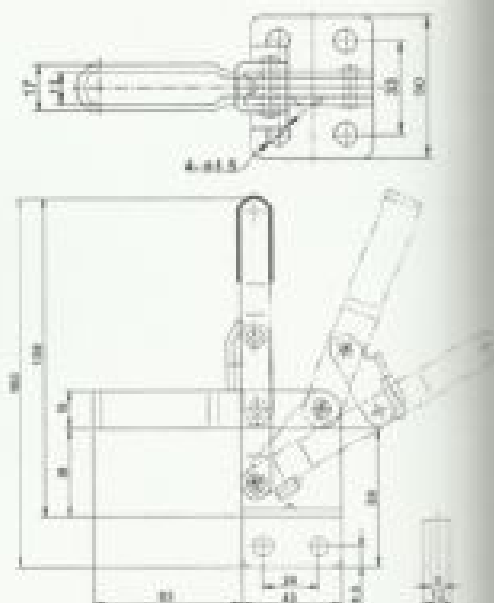

GH-12130 THRU GH-12137

HOLDING CAPACITY(夹持力): 227kg

SPINDLE SUPPLIED(压头螺丝型号): M8×70

BAR OPENS(压把开启角度): 90°

HANDLE OPENS(手柄开启角度): 60°




GH-12130



GH-12132

MODEL	DESCRIPTION	WEIGHT(g)
GH-12130	SHORTU-BAR, FLANGED BASE, STRAIGHT HANDLE	275
GH-12131	SHORTU-BAR, STRAIGHT BASE, T-HANDLE	335
GH-12132	LONGU-BAR, FLANGED BASE, STRAIGHT HANDLE	350
GH-12137	LONGU-BAR, STRAIGHT BASE, T-HANDLE	365

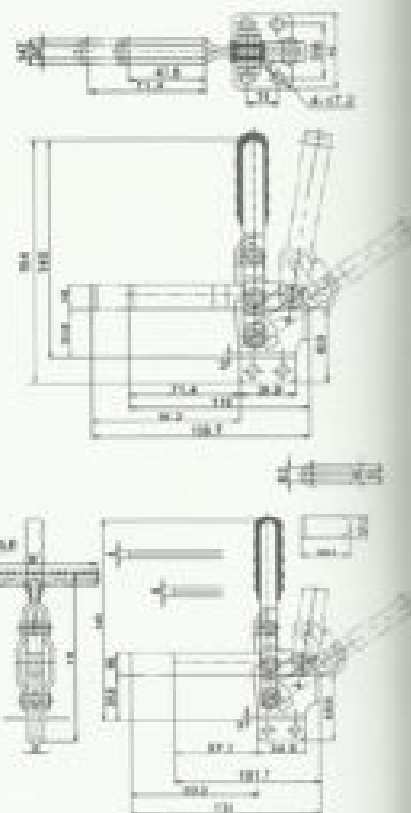

垂直式 Vertical




GH-12205

WEIGHT(自重): 620g
HOLDING CAPACITY(夹持力): 180kg
SPINDLE SUPPLIED(压头螺柱型号):
M10×80
BAR OPENS(压把开启角度): 101°
HANDLE OPENS(手柄开启角度): 67°



GH-12205

MODEL	DESCRIPTION
GH-12205	U-BAR, FLANGED BASE
GH-12230	U-BAR, STRAIGHT BASE

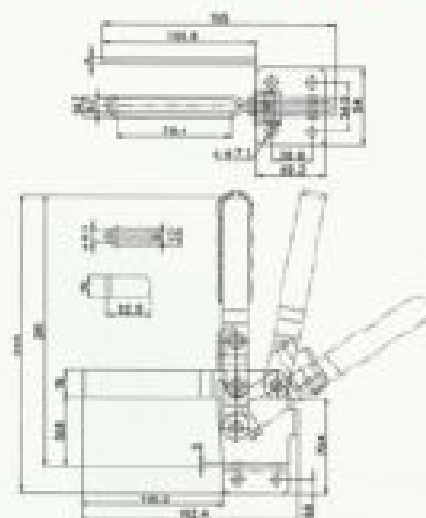


GH-13002-B THRU GH-13002-BI

GH-13002-B has
Hardened bushings
Removable ground pins.
(产品转动关键部位装有耐磨套)
SPINDLE SUPPLIED(压头螺柱型号):
M8×80



GH-13002-B

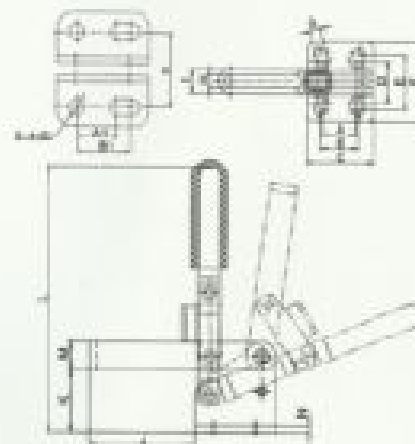

MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	SPINDLE SUPPLIED	BAR SIZE	HANDLE OPENS	A	A1	B	B1	C	D	D1	E	F	GH	H	I	J	K	L	M	N
GH-12002-B	240	250	GH-SA-004014	3/8"	70°	12.7	19	35	25	27	42	6.5	13.5	44	31	137	13	1				
GH-13002-B	530	250	GH-SA-005511	3/8"	67°	19	26	45	33.5	52.5	8	8.7	14.7	100	35	150	18	3				


GH-11412

WEIGHT(自重): 379g
HOLDING CAPACITY(夹持力): 260kg
SPINDLE SUPPLIED(压头螺柱型号):
M8×60
BAR OPENS(压把开启角度): 110°
HANDLE OPENS(手柄开启角度): 64°



GH-11412

MODEL	DESCRIPTION
GH-11412	FLANGED BASE

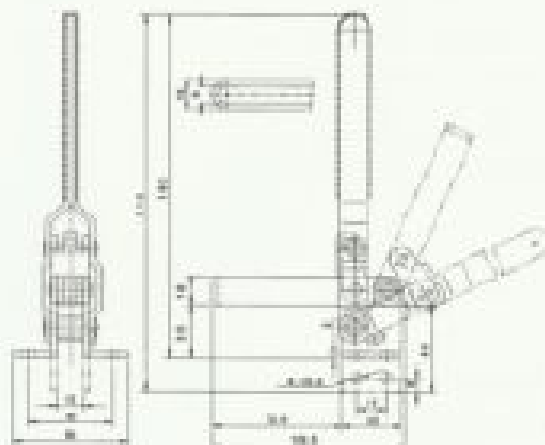

GH-12265

WEIGHT(自重): 574g

Hardened bushings Removable ground pins.

(产品转动关键部位采用耐磨套)

HOLDING CAPACITY(夹持力): 340kg

SPINDLE SUPPLIED(压头螺丝型号):


M10×80

BAR OPENS(压把开启角度): 105°

HANDLE OPENS(手柄开启角度): 58°



GH-12265

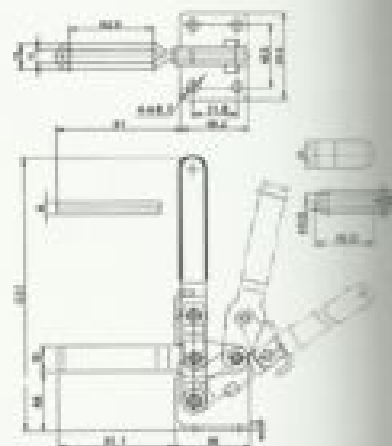

MODEL	DESCRIPTION	WEIGHT(g)
GH-12265	U-BAR, FLANGED BASE, STRAIGHT HANDLE	574
GH-12279	U-BAR, STRAIGHT BASE, STRAIGHT HANDLE	625

GH-101-EL

WEIGHT(自重): 742g

HOLDING CAPACITY(夹持力):

350kg

SPINDLE SUPPLIED(压头螺丝型号):


M10×80

BAR OPENS(压把开启角度): 10°

HANDLE OPENS(手柄开启角度): 60°



GH-101-EL

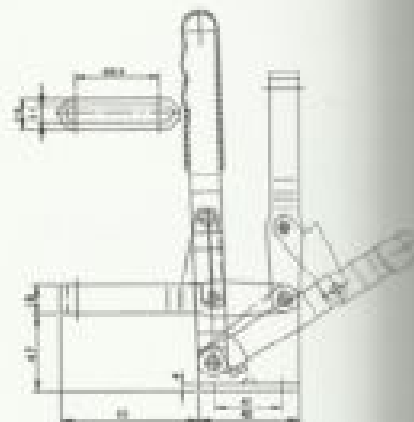

GH-10444 THRU GH-10448


HOLDING CAPACITY(夹持力): 400kg

SPINDLE SUPPLIED(压头螺丝型号):

GH-SA-38200

BAR OPENS(压把开启角度): 129°

HANDLE OPENS(手柄开启角度): 75.5°

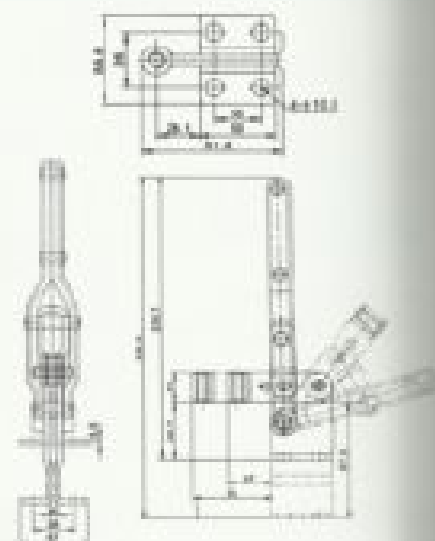


MODEL	DESCRIPTION
GH-10444	LONG BAR, FLANGED BASE
GH-10448-L	SHORT BAR, FLANGED BASE
GH-10448-H	SHORT BAR, HIGH FLANGED BASE

GH-101-H

WEIGHT(重量) : 1183g
HOLDING CAPACITY(夹持力) : 450kg
SPINDLE SUPPLIED(压头螺栓型号) :
M12×80
BAR OPENS(压把开启角度) : 101°
HANDLE OPENS(手柄开启角度) : 53°




GH-101-H

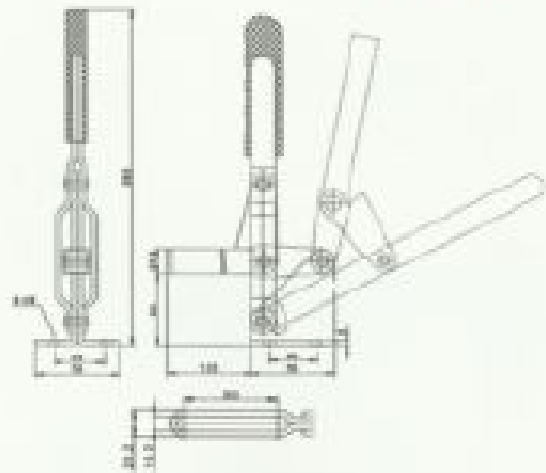

GH-10247


Hardened bushings Removable ground pins.
(产品转动关键部位装有耐磨套)
WEIGHT(重量) : 1218g
HOLDING CAPACITY(夹持力) : 450kg
SPINDLE SUPPLIED(压头螺栓型号) :
M12×80
BAR OPENS(压把开启角度) : 100°-135°
HANDLE OPENS(手柄开启角度) :
58°-70°

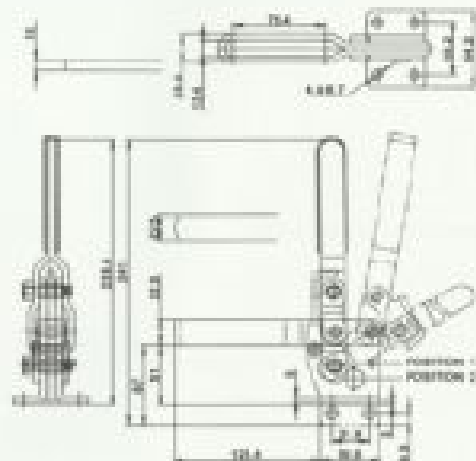

MODEL	DESCRIPTION
GH-10247	U-BAR, FLANGED BASE
GH-10248	U-BAR, STRAIGHT BASE

GH-101-J

Hardened bushings Removable ground pins.
(产品转动关键部位装有耐磨套)
WEIGHT(重量) : 2540g
HOLDING CAPACITY(夹持力) : 510kg
SPINDLE SUPPLIED(压头螺栓型号) :
M12×80
BAR OPENS(压把开启角度) : 100-140°
HANDLE OPENS(手柄开启角度) : 48-60°

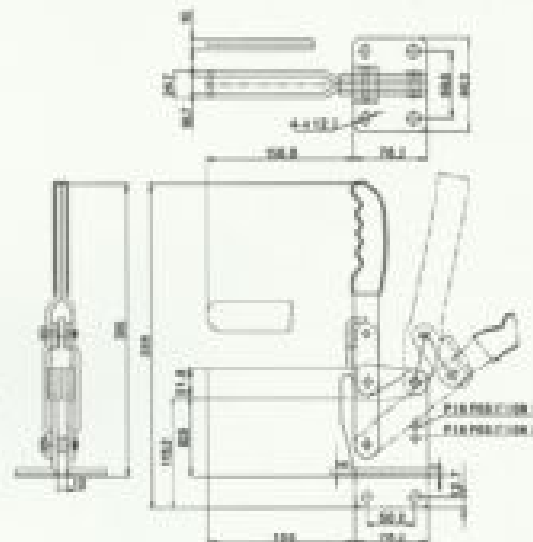

MODEL	DESCRIPTION
GH-101-J	U-BAR, FLANGED BASE
GH-101-JS	SOLID BAR, FLANGED BASE


GH-201 THRU GH-201-A

HOLDING CAPACITY(保持力) : 27kg

SPINDLE SUPPLIED(压头螺丝型号) : M4×27

BAR OPENS(压把开启角度) : 90°

HANDLE OPENS(手柄开启角度) : 10°

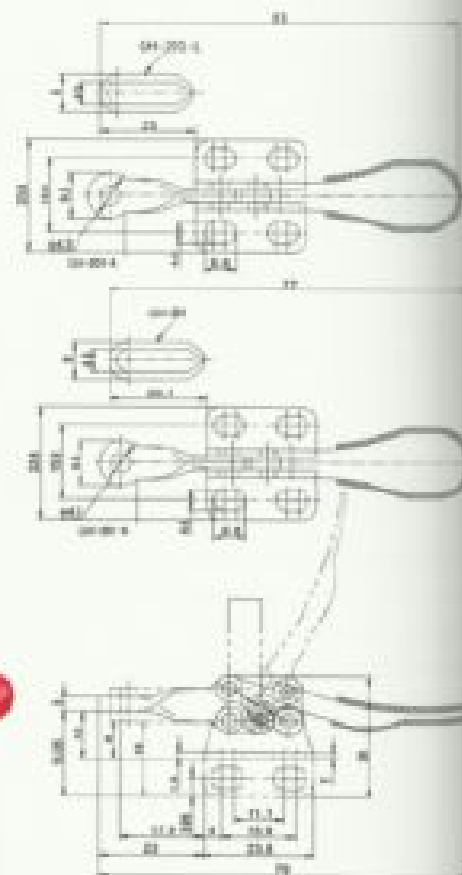

MODEL	DESCRIPTION	Weight(g)	1
GH-201-A	SHORT BAR, FLANGED BASE	28	1.1
GH-201-A-L	SHORT BAR, STRAIGHT BASE	28	1.1
GH-201	U-BAR, FLANGED BASE	31	1.1
GH-201-L	U-BAR, STRAIGHT BASE	31	1.1
GH-201-A	U-BAR, LEFT HAND FLANGED BASE	31	1.1
GH-201-SS	STAINLESS STEEL		
GH-201-A-SS	STAINLESS STEEL		

GH-20400

WEIGHT(自重) : 32.6g


HOLDING CAPACITY(保持力) : 20kg

SPINDLE SUPPLIED(压头螺丝型号) :

M4×27

BAR OPENS(压把开启角度) : 55°

HANDLE OPENS(手柄开启角度) : 60°

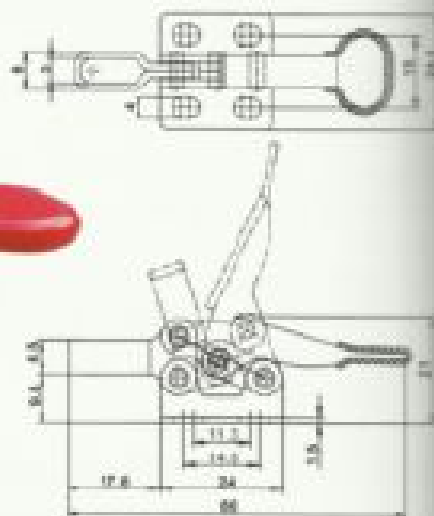

GH-20800 AND GH-21800

WEIGHT(重量) : 42g

HOLDING CAPACITY(夹持力) : 30kg


SPINDLE SUPPLIED(压头螺栓型号) : M4×25

BAR OPENS(压把开启角度) : 80°

HANDLE OPENS(手柄开启角度) : 82°



MODEL	DESCRIPTION
GH-20800	FLANGED BASE
GH-21800	STRAIGHT BASE
GH-20800-SS	STAINLESS STEEL

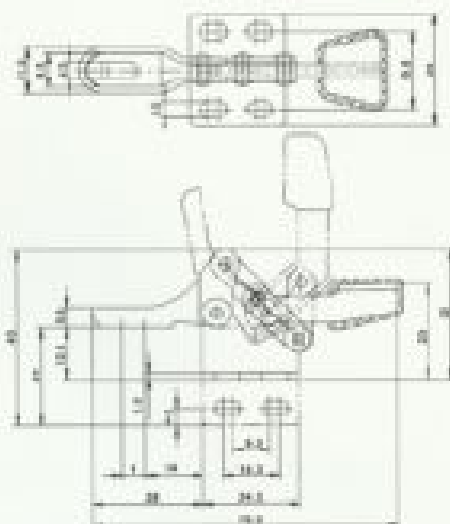

GH-20300


WEIGHT(重量) : 39.6g

HOLDING CAPACITY(夹持力) : 30kg

SPINDLE SUPPLIED(压头螺栓型号) : M4×40

BAR OPENS(压把开启角度) : 65°

HANDLE OPENS(手柄开启角度) : 53°

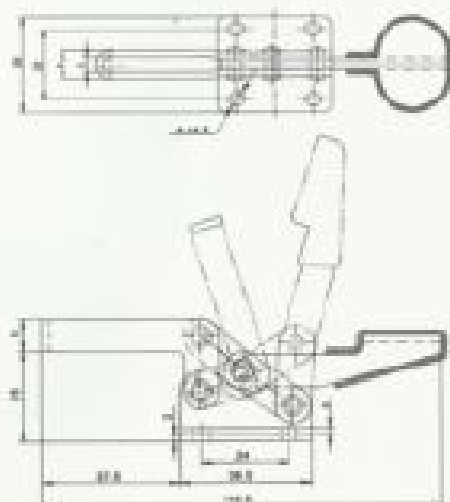

GH-20100


WEIGHT(重量) : 35g

HOLDING CAPACITY(夹持力) : 20kg

SPINDLE SUPPLIED(压头螺栓型号) : M4×25

BAR OPENS(压把开启角度) : 75°

HANDLE OPENS(手柄开启角度) : 70°

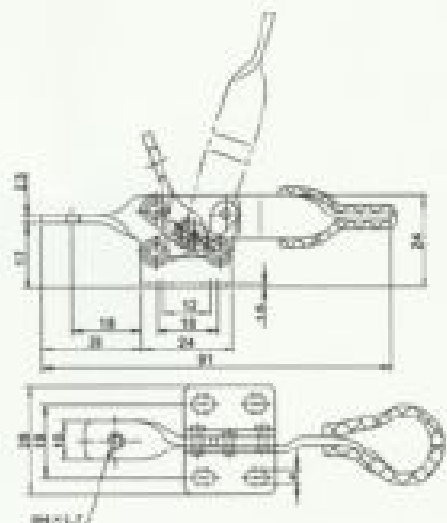



水平式 Horizontal

GH-201-B THRU GH-201-BSS

WEIGHT(自重): 123g

HOLDING CAPACITY(夹持力): 90kg


SPINDLE SUPPLIED(压头螺柱型号):

M6x45

BAR OPENS(压把开启角度): 85°

HANDLE OPENS(手柄开启角度):

60°

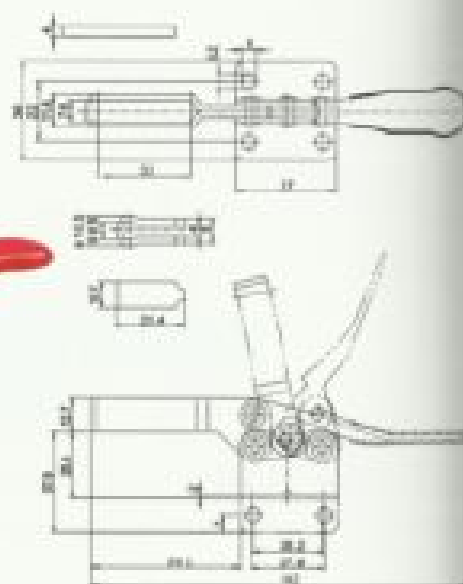

MODEL	DESCRIPTION
GH-201-B	U-BAR, FLANGE BASE
GH-201-B1	U-BAR, STRAIGHT BASE
GH-201-B3	SHORT BAR, FLANGE BASE
GH-201-B33	SHORT BAR, STRAIGHT BASE
GH-201-BSS	STAINLESS STEEL

GH-201-C

WEIGHT(自重): 113.4g

HOLDING CAPACITY(夹持力): 152kg


SPINDLE SUPPLIED(压头螺柱型号):

M6x45

BAR OPENS(压把开启角度): 79°

HANDLE OPENS(手柄开启角度):

92°

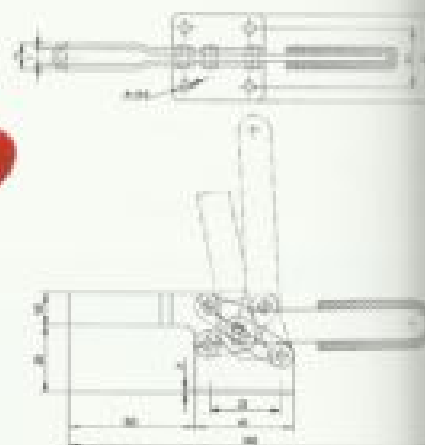

GH-22100

WEIGHT(自重): 124g

HOLDING CAPACITY(夹持力): 68kg


SPINDLE SUPPLIED(压头螺柱型号):

M6x45

BAR OPENS(压把开启角度): 90°

HANDLE OPENS(手柄开启角度):

60°

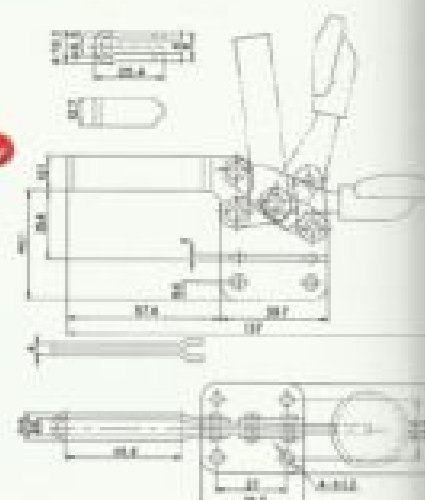

MODEL	DESCRIPTION
GH-22100	U-BAR, FLANGE BASE
GH-22105	U-BAR, STRAIGHT BASE

GH-20752-B

WEIGHT(重量): 88g


GH-20752-B has

Hardened bushings Removable ground pins

(在轴心位置部位装有耐磨套)

SPINDLE SUPPLIED(压头螺丝型号):

M8×45

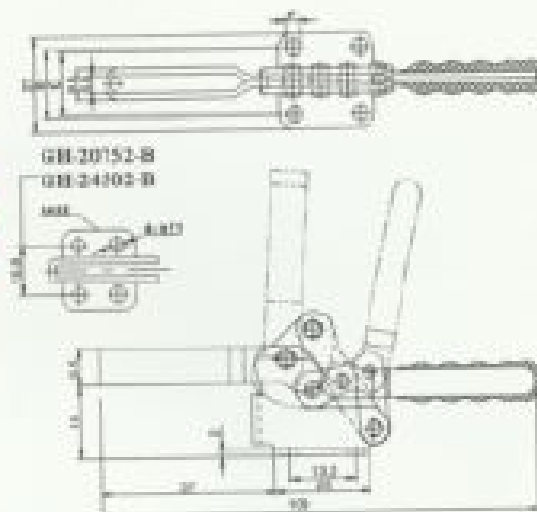

GH-225-D THRU GH-225-DI


WEIGHT(重量): 234g

HOLDING CAPACITY(夹持力): 227kg

SPINDLE SUPPLIED(压头螺丝型号): M8×50

BAR OPENS(压把开启角度): 90°

HANDLE OPENS(手柄开启角度): 65°

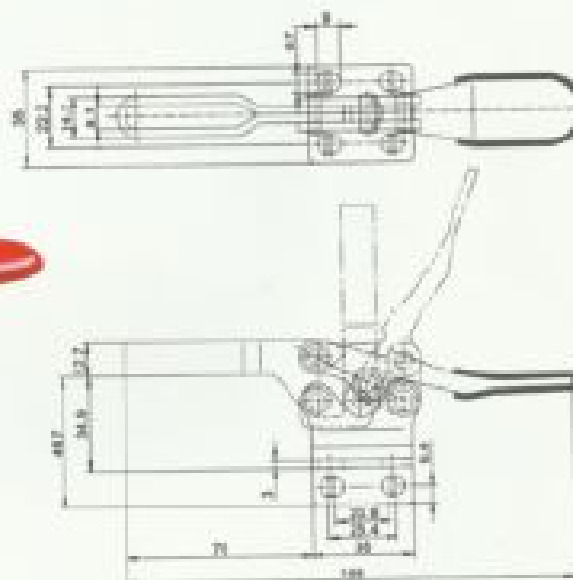

MODEL	DESCRIPTION
GH-225-D	U-BAL, PL, JACOBY BASE
GH-225-DI	U-BAL, STRAIGHT BASE
GH-225-DSS	STAINLESS STEEL

GH-225-DHB

WEIGHT(重量): 234g


HOLDING CAPACITY(夹持力): 227kg

SPINDLE SUPPLIED(压头螺丝型号): M8×60

BAR OPENS(压把开启角度): 90°

HANDLE OPENS

(手柄开启角度): 65°

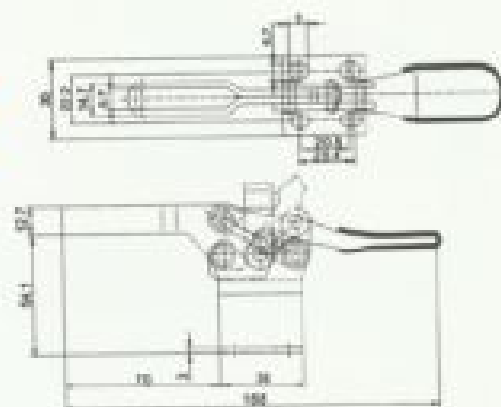



水平式 Horizontal

GH-203-F GH-202-F GH-203-FL GH-202-FL GH-203-P

HOLDING CAPACITY(夹持力): 227kg

SPINDLE SUPPLIED(压头螺柱型号): M8-60

BAE OPENS(压把开启角度): 85°

HANDLE OPENS(手柄开启角度): 58°



GH-203-P





GH-203-F



GH-202-F



GH-202-FL

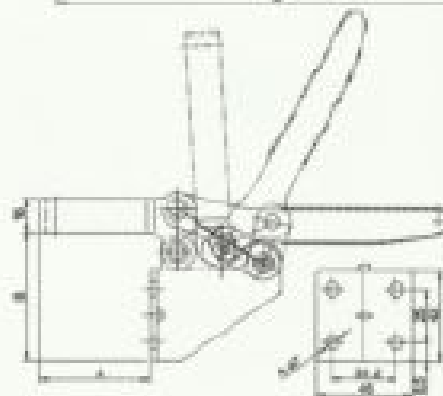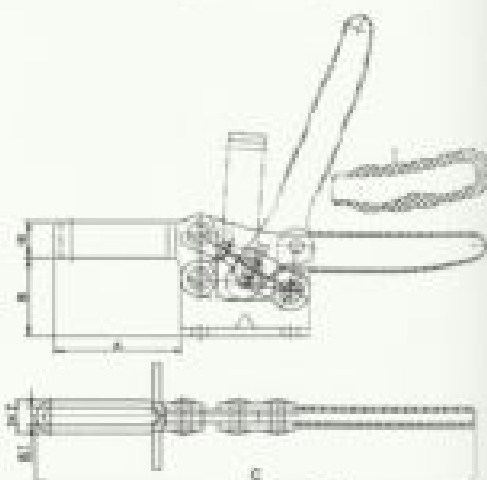

GH-203-FL


MODEL	DESCRIPTION	WGT(kg)	A	B	C
GH-203-F	U-BASE, FLANGED BASE	353	57	343	170
GH-203-FL	CONGO-BASE, FLANGED BASE	376	64	344	200
GH-202-F	U-BASE, STRAIGHT BASE	372	52	60	170
GH-202-FL	CONGO-BASE, STRAIGHT BASE	400	69	60	230
GH-203-P	U-BASE, FLANGED BASE, LONG HANDLE	370	57	363	210

水平式 Horizontal



GH-25382 AND GH-21382

WEIGHT(自重): 510g
HOLDING CAPACITY(夹持力): 280kg
SPINDLE SUPPLIED(压头螺柱型号): M13×80
BAR OPENS(压把开启角度): 80°
HANDLE OPENS(手柄开启角度): 80°

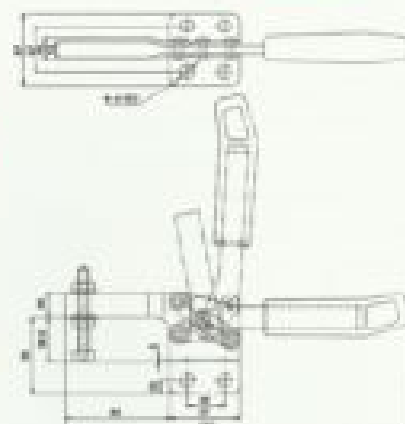

MODEL	DESCRIPTION
GH-21382	FLANGED BASE
GH-25382	STRAIGHT BASE

GH-200-W THRU GH-220-WLH

M13×80

M10×100



GH-200-W



GH-200-WH



GH-200-WL



GH-200-WLH



GH-220-WH



GH-220-WLH



MODEL	WEIGHT (g)	HOLDING CAPACITY (kg)	SPINDLE SUPPLIED	BAR OPEN	HANDLE OPEN	A	B	C	D	4E	F	G	H	I	J	K
GH-200-W	150	400	GH-FC-38X2	75°	77°	12.6	19	38	50	15	42	70	68	14	20.1	240
GH-200-WL	160					12.6	19	38	50	15	42	70	138	14	20.1	290
GH-200-WH	160					12.6	19	38	50	15	42	70	68	79	20.1	240
GH-200-WLH	160		GH-FC-38X2			12.6	19	38	50	15	42	70	138	79	20.1	290
GH-220-WH	175					12.6	19	38	50	15	42	70	68	79	20.1	240
GH-220-WLH	175					12.6	19	38	50	15	42	70	138	79	20.1	290



水平式 Horizontal

GH-20235 THRU GH-20236


WEIGHT(重量) : 570g

HOLDING CAPACITY(夹持力) : 340kg

SPINDLE SUPPLIED(压头螺絲型号) : M10×80

BAR OPENS(压把开合角度) : 85°

HANDLE OPENS(手柄开合角度) : 30°

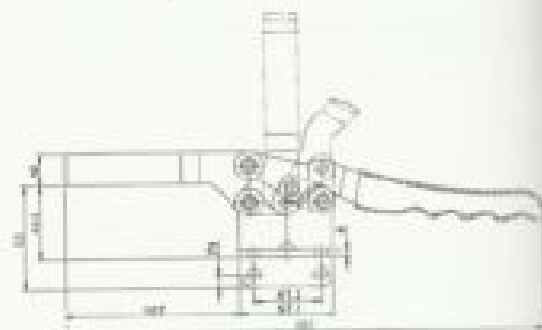

MODEL	DESCRIPTION
GH-20235	U-BAR, FLANGED BASE
GH-20236	U-BAR, STRAIGHT BASE
GH-20235-SS	STAINLESS STEEL

GH-204-GB GH-204-GBL GH-204-GBLH

HOLDING CAPACITY(夹持力) : 630kg

SPINDLE SUPPLIED(压头螺絲型号) : M12×80

BAR OPENS(压把开合角度) : 90°


HANDLE OPENS(手柄开合角度) : 94°



GH-204-GBLH



GH-204-GB

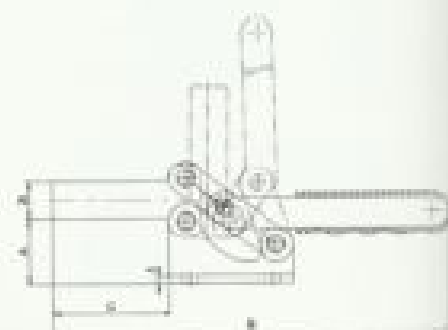

MODEL	DESCRIPTION	WEIGHT(g)	A	B	C
GH-204-GB	SHORT BAR, LOW BASE	1300	45	260	80
GH-204-GBL	LONG BAR, LOW BASE	1360	45	306	128
GH-204-GBLH	LONG BAR, HIGH BASE	1425	71	306	128

水平式 Horizontal



GH-204-G GH-204-GL

Heavy Duty

*Can be Mounted to any Fixture Using the 4 Hole Bolt Pattern or to Any T-Slot Table with T-Slot Bolt. 安装方便, 适用于螺栓, T型槽和T型槽性安装等。

*Supplied with bushings

*Hardened ground pivots 在产品转动关键部位装有耐磨套


WEIGHT(自重): 1220g

HOLDING CAPACITY(夹持力): 536kg

SPINDLE SUPPLIED(压头螺柱型号): M12×70

BAR OPENS(压把开启角度): 93°

HANDLE OPENS(手柄开启角度): 94°

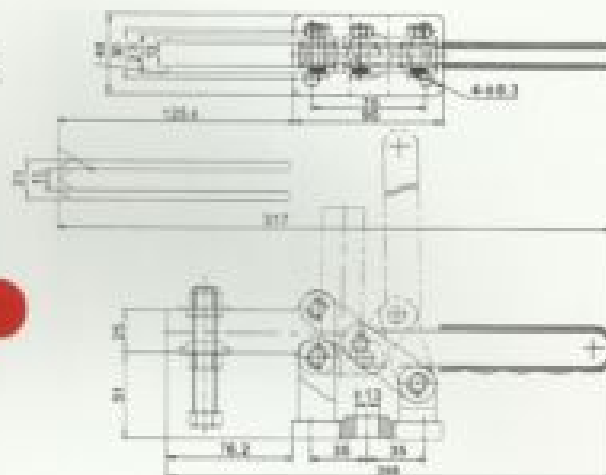

MODEL	DESCRIPTION
GH-204-G	OPENER, DUCTILE IRON BASE
GH-204-GL	LONG OPENER, DUCTILE IRON BASE

GH-22185


WEIGHT(自重): 360g

HOLDING CAPACITY(夹持力): 250kg

SPINDLE SUPPLIED(压头螺柱型号): M8×60

BAR OPENS(压把开启角度): 96°

HANDLE OPENS(手柄开启角度): 88°

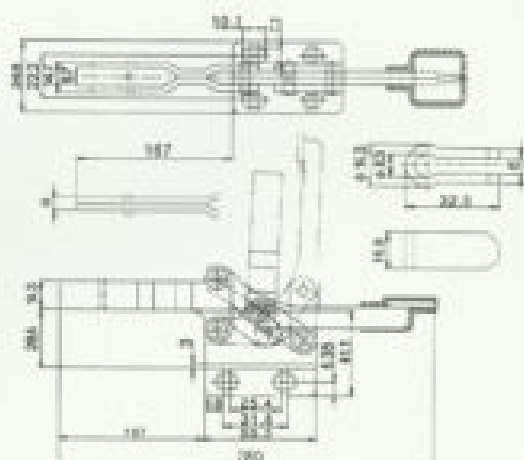

GH-25383


WEIGHT(自重): 530g

HOLDING CAPACITY(夹持力): 280kg

SPINDLE SUPPLIED(压头螺柱型号): M8×50

BAR OPENS(压把开启角度): 80°

HANDLE OPENS(手柄开启角度): 80°

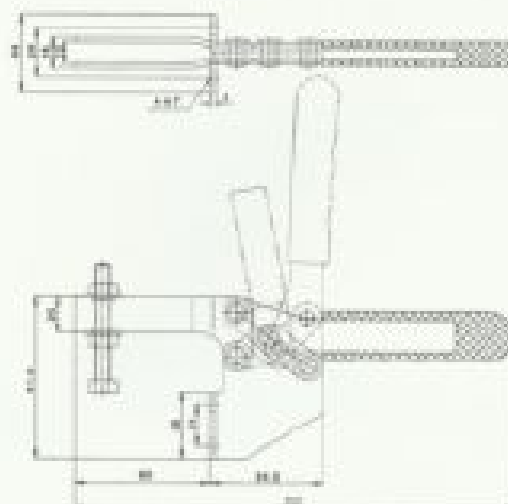




水平式 Horizontal


GH-21383

WEIGHT(重量) : 250g
 HOLDING CAPACITY(夹持力) : 250kg
 SPINDLE SUPPLIED(压头螺柱型号) : M8×50
 BAR OPENS(压把开启角度) : 72°
 HANDLE OPENS(手柄开启角度) : 72°

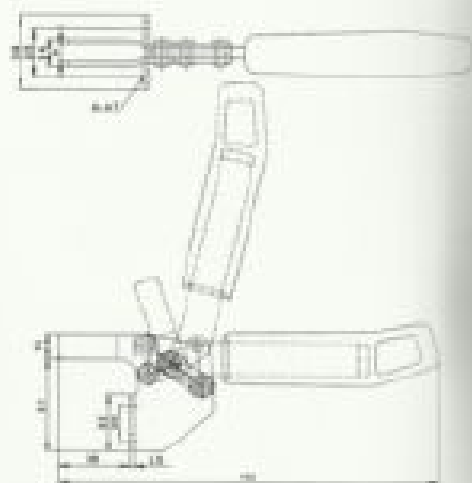


GH-21384

WEIGHT(重量) : 790g
 HOLDING CAPACITY(夹持力) : 500kg
 SPINDLE SUPPLIED(压头螺柱型号) : M8×50
 BAR OPENS(压把开启角度) : 65°
 HANDLE OPENS(手柄开启角度) : 85°

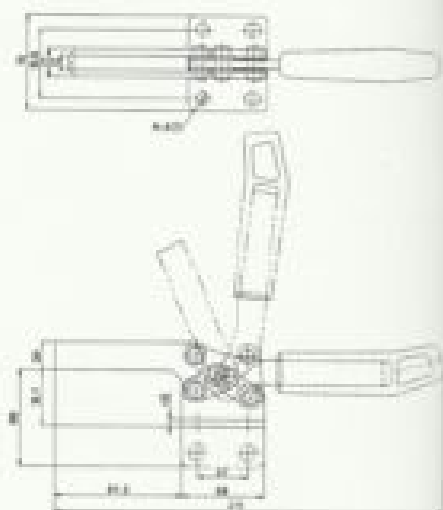

GH-301-AM AND GH-301-BM

WEIGHT(重量) : 40g
 HOLDING CAPACITY(夹持力) : 40kg
 SPINDLE SUPPLIED(压头螺柱型号) : M4×20
 HANDLE OPENS(手柄开启角度) : 100°
 PLUNGER STROKE(行程) : 16mm

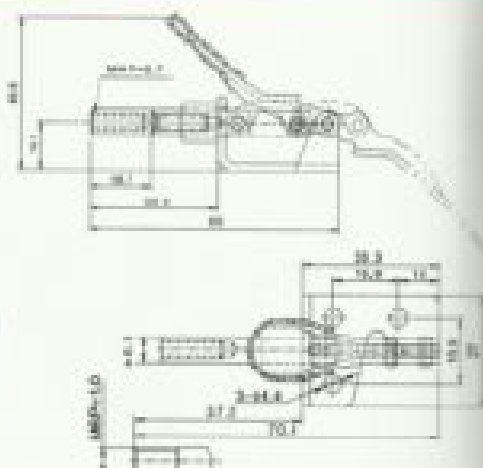


推拉式 Push-pull




GH-301-AL

WEIGHT(自重) : 73g
HOLDING CAPACITY(夹持力) : 90kg
SPINDLE SUPPLIED(压头螺栓型号) : M4×20
HANDLE OPENS(手柄开启角度) : 190°
PLUNGER STROKE(行程) : 30mm
GH-301-AMSS

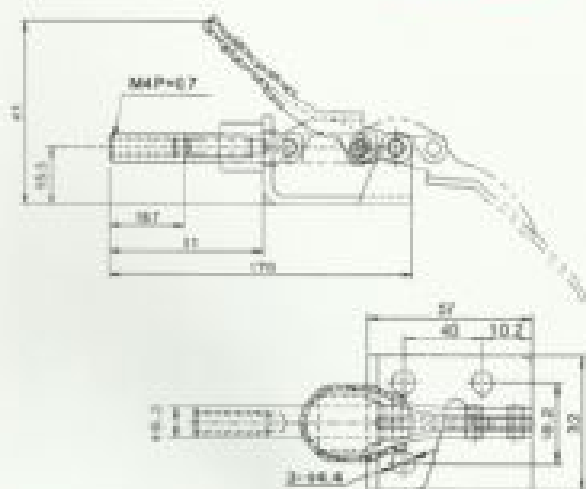

GH-302-FM AND GH-302-FMSS


WEIGHT(自重) : 290g
HOLDING CAPACITY(夹持力) : 135kg
SPINDLE SUPPLIED(压头螺栓型号) : M8×30
HANDLE OPENS(手柄开启角度) : 180°
PLUNGER STROKE(行程) : 12mm

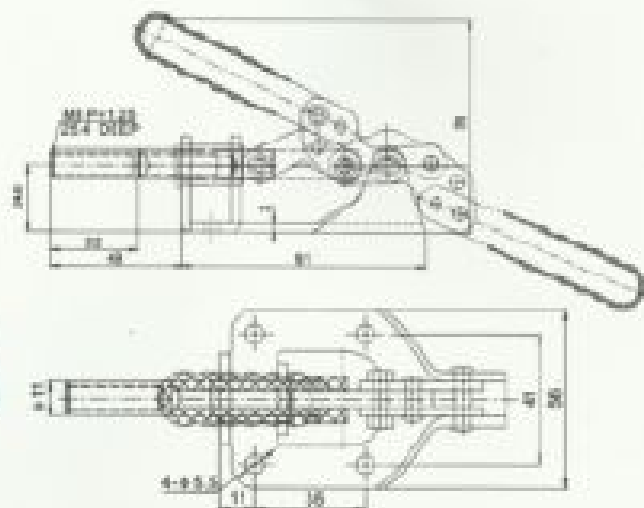

GH-302-DM

*Plunger locks in Extended Position Only 手柄下压为锁紧状态。

WEIGHT(自重) : 444g
HOLDING CAPACITY(夹持力) : 160kg
HANDLE OPENS(手柄开启角度) : 45°
PLUNGER STROKE(行程) : 12mm

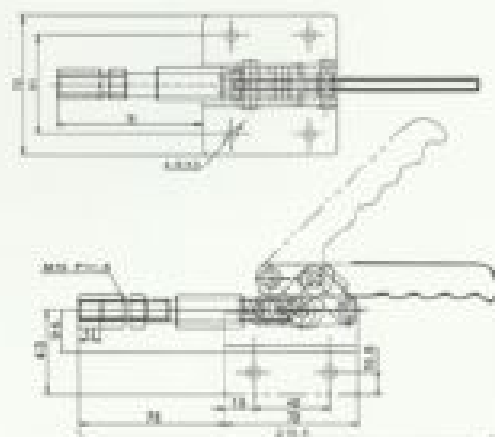

MODEL	DISCRIPTION
GH-302-FM	FLANGED BASE
GH-302-FMSS	STAINLESS STEEL

GH-36020

*GH-36020-K has a key way to keep the Plunger form rotating.

(GH-36020-K 手柄上装有一个键，防止顶丝转动)

WEIGHT(自重): 335.4g

HOLDING CAPACITY(夹持力): 180kg

SPINDLE SUPPLIED(压头螺柱型号):


M8×30

HANDLE OPENS(手柄开启角度):

144.5°

PLUNGER STROKE(行程):

30mm

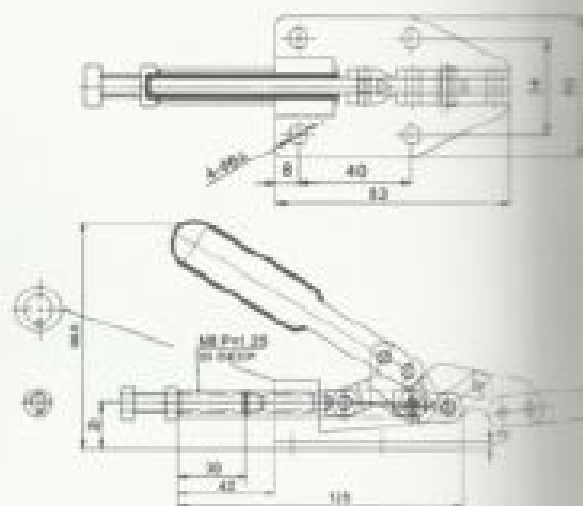

GH-303-EM

*GH-36020-K has a key way to keep the Plunger form rotating.

(GH-36020-K 手柄上装有一个键，防止顶丝转动)

WEIGHT(自重): 822g

HOLDING CAPACITY(夹持力):


454kg

HANDLE OPENS(手柄开启角度):

190°

PLUNGER STROKE(行程):

50mm

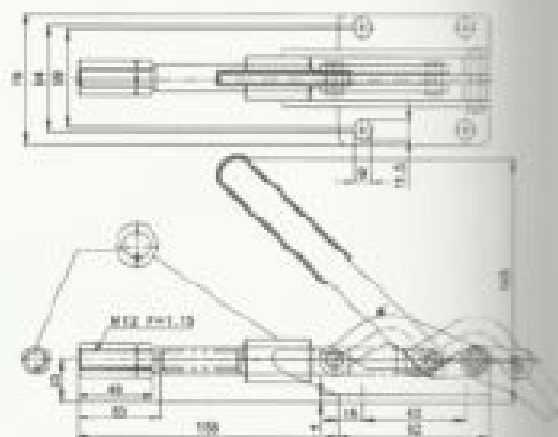

GH-305-EL

*GH-36020-K has a key way to keep the Plunger form rotating.

(GH-36020-K 手柄上装有一个键，防止顶丝转动)


WEIGHT(自重): 712g

HOLDING CAPACITY(夹持力): 550kg

SPINDLE SUPPLIED(压头螺柱型号): M10×30

HANDLE OPENS(手柄开启角度): 190°

PLUNGER STROKE(行程): 63mm

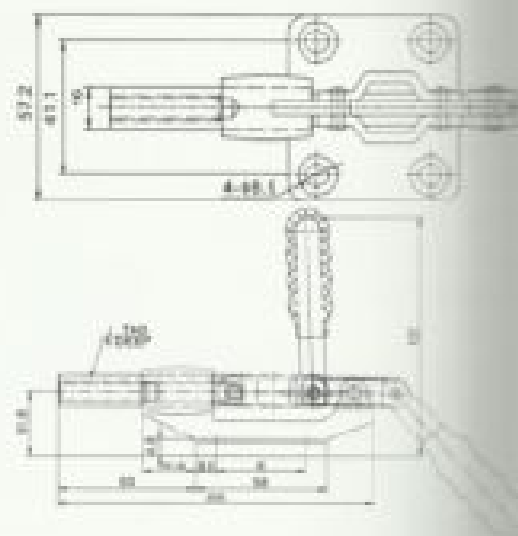

GH-304-CM AND GH-305-CM GH-304-EM AND GH-305-EM GH-304-HM AND GH-305-HM

*Ductile iron base 底座为铸钢


*GH-304-HM and GH-305-HM have bushings and rem-ovable hardened ground pins 手柄销轴孔装有耐磨套



GH-305-CM
M8×30



GH-305-EM
M10×30

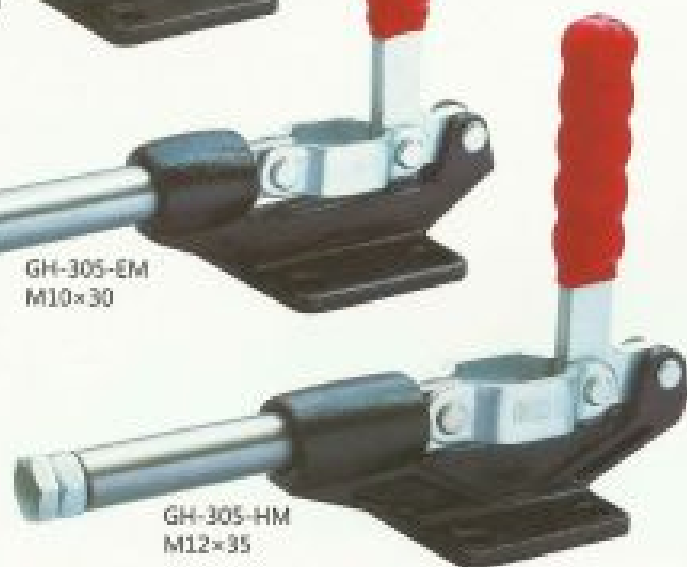

GH-305-HM
M12×35





GH-304-CM



GH-304-EM



GH-304-HM

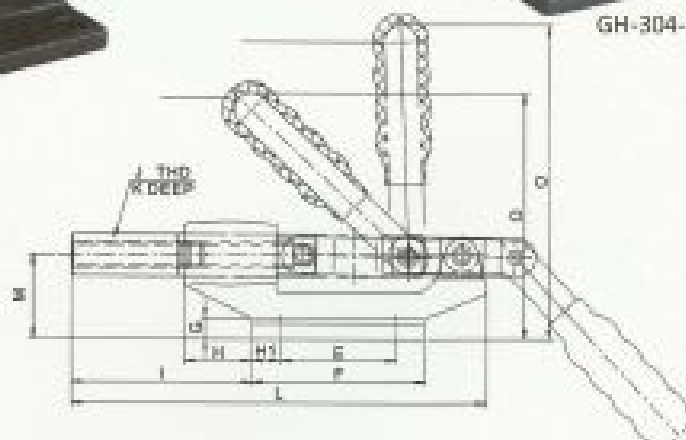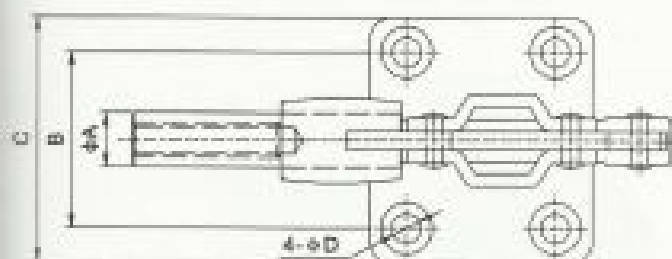

MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	GRIND (A SUPPLY)	A	B	C	±D	E	F	G	H	H1	I	J	K	L	M	N	HUNGER STROKE
GH-304-CM	340	227	GH-5A-085012	12.7	41.3	57.2	6.7	35	52.4	4.8	26.6	8.7	54.8	M8P=1.25	39.2	125.7	25.4	74.2	32
GH-305-CM	340	227		12.7	41.3	57.2	6.7	35	52.4	4.8	26.6	8.7	54.8	M8P=1.25	39.2	125.7	25.4	94.8	
GH-304-EM	558	386	GH-5A-105015	16	41.3	57.2	8.3	41.1	58.8	4.8	31.8	8.8	78	M10P=1.5	39.2	158.2	31.8	93.5	42
GH-305-EM	558	386		16	41.3	57.2	8.3	41.1	58.8	4.8	31.8	8.8	78	M10P=1.5	39.2	158.2	31.8	119.5	
GH-304-HM	1350	680	GH-5A-125017	18.2	50.8	71.4	8.3	50.8	73.2	6.4	50.8	11.1	119.8	M12P=1.75	49.2	235	44.4	133.5	60
GH-305-HM	1350	680		18.2	50.8	71.4	8.3	50.8	73.2	6.4	50.8	11.1	119.8	M12P=1.75	49.2	235	44.4	171.6	

GH-304-EMSS

GH-36330M

*Forged alloy steel base(底座为锻造合金钢)

WEIGHT(自重) : 993g

HOLDING CAPACITY(夹持力) : 1130kg

SPINDLE SUPPLIED(压头螺丝型号) :


M10×30

HANDLE OPENS(手柄开启角度) :

180°

PLUNGER STROKE(行程) :

50.8mm

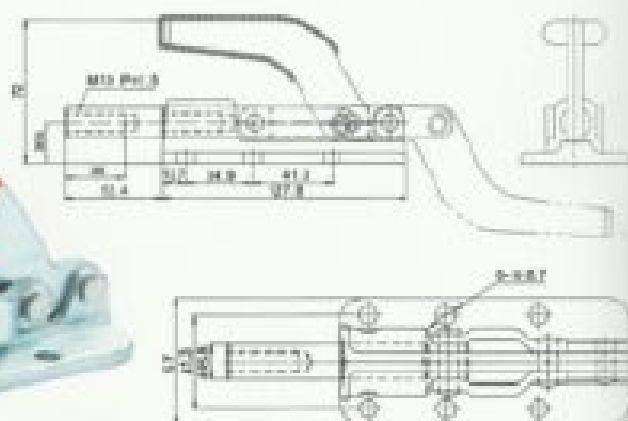

GH-36080 AND GH-36080C

*Forged alloy steel base(底座为锻造合金钢)

WEIGHT(自重) : 1248g

HOLDING CAPACITY(夹持力) : 580kg

SPINDLE SUPPLIED(压头螺丝型号) :


M8×30

HANDLE OPENS(手柄开启角度) :

180°

PLUNGER STROKE(行程) :

80mm

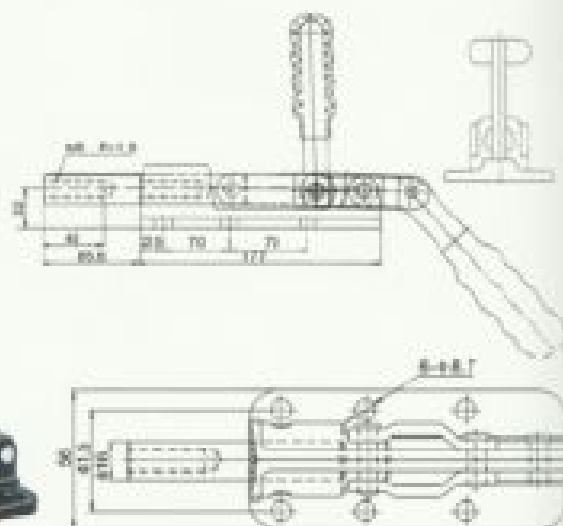

GH-36330LL

*Forged alloy steel base(底座为锻造合金钢)

WEIGHT(自重) : 2744g

HOLDING CAPACITY(夹持力) : 680kg

SPINDLE SUPPLIED(压头螺丝型号) :


M10×30

HANDLE OPENS(手柄开启角度) :

180°


PLUNGER STROKE(行程) :

120mm

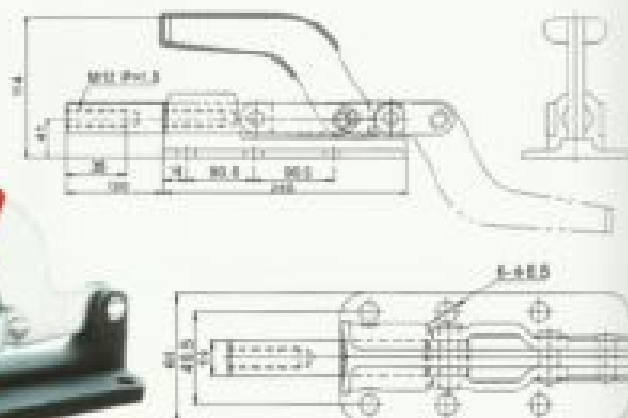





PLUNGER STROKE/FINN : 31.8mm

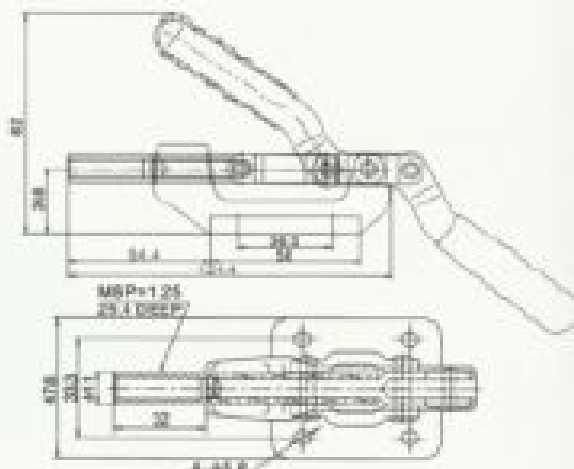

© 2000 Springer-Verlag

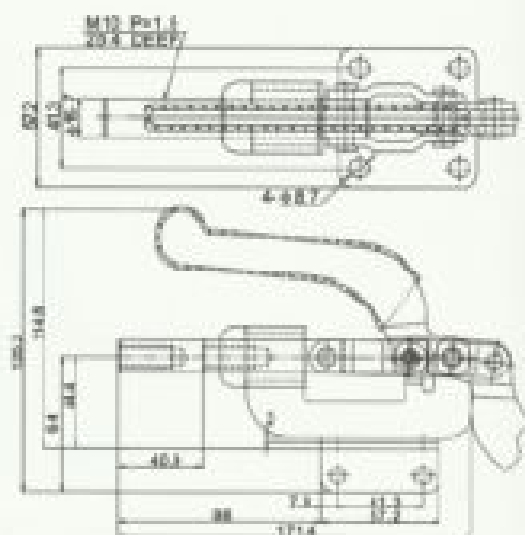

PLUNGER STROKE (STD) : 30mm

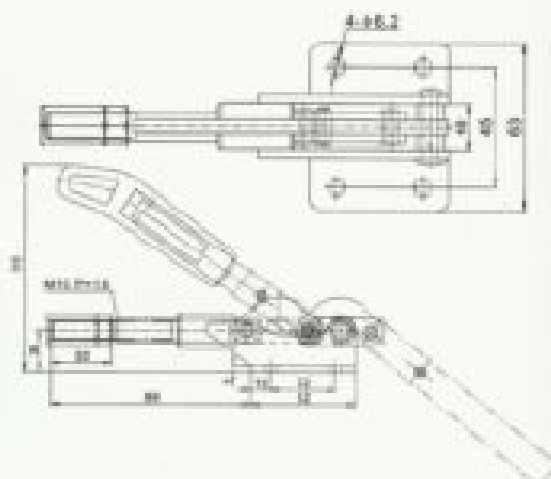


推拉式 Push-pull




GH-36070

WEIGHT(自重) : 97g
HOLDING CAPACITY(夹持力) : 50kg
SPINDLE SUPPLIED(压头螺套型号) : MS-16
HANDLE OPENS(手柄开合角度) : 66°
PLUNGER STROKE(行程) : 30mm

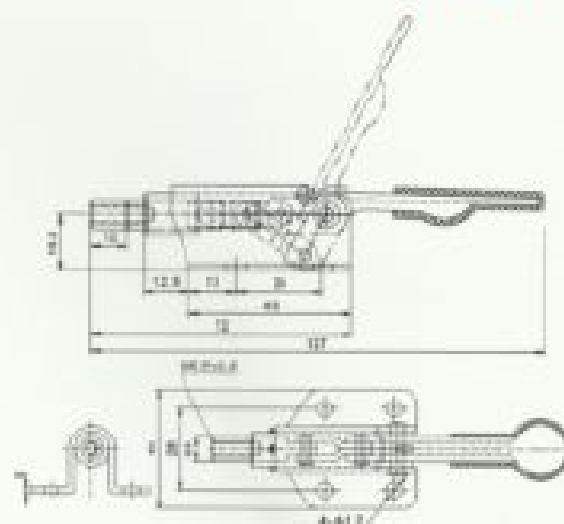


GH-36006

WEIGHT(自重) : 58g
HOLDING CAPACITY(夹持力) : 50kg
SPINDLE SUPPLIED(压头螺套型号) : MS-15
HANDLE OPENS(手柄开合角度) : 93°
PLUNGER STROKE(行程) : 15mm

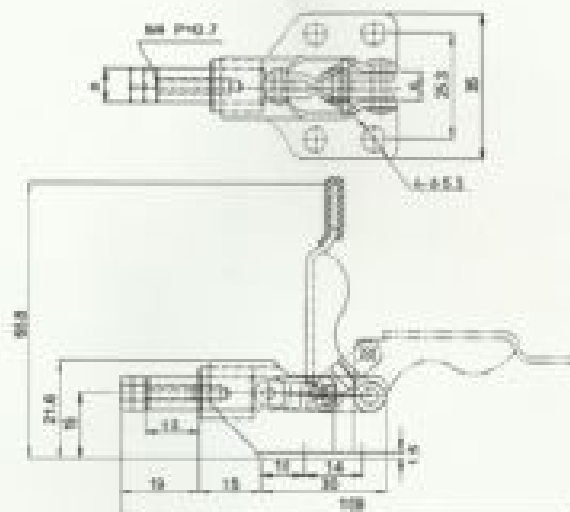

GH-36092M AND GH-36092MSS

WEIGHT(自重) : 397g
HOLDING CAPACITY(夹持力) : 180kg
SPINDLE SUPPLIED(压头螺套型号) : MS-20
HANDLE OPENS(手柄开合角度) : 140°
PLUNGER STROKE(行程) : 52mm

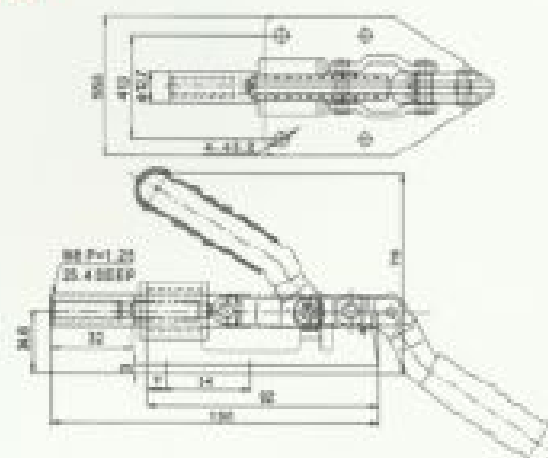

推拉式 Push-pull



GH-36202 GH-36204 GH-36224

*Plunger Clamp With Threaded Collar for Mounting Through Panels or Plates
无锁体基件通过面安装

GH-36224
M10×50

GH-36204
M8×50

GH-36202
M6×40




36205



36225



36203

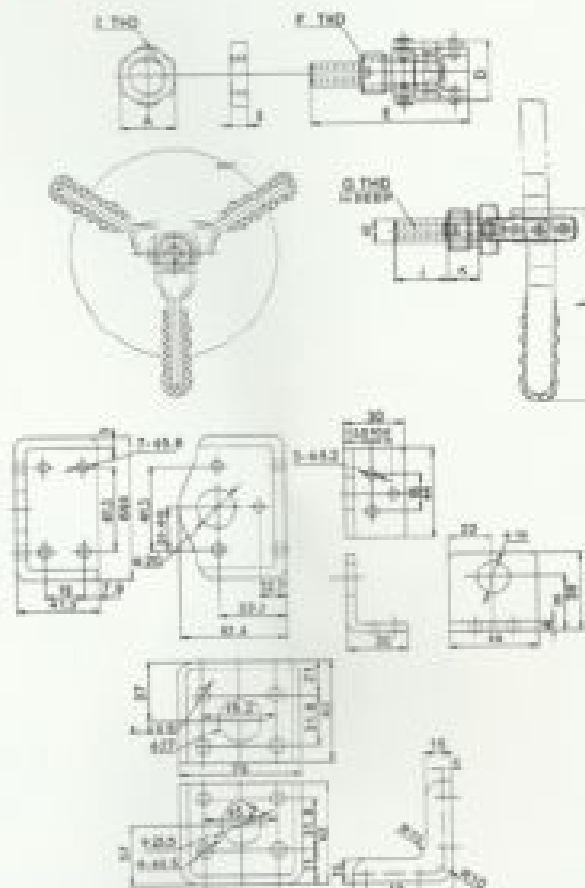

MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	PLUNGER STROKE	OPTIONAL WITH (mm)	A	B	C	D	E	F	G	H	I	J	K	L
GH-36202	113	91	10	GH-36203	24	6.4	11.6	+0.5	21	64.2	M6×1	15.8	9.4	21	11.7	75
GH-36204	255	138	19	GH-36205	30	6.4	12.0	+0.5	24.2	11.5	M8×1.25	25.4	11	29.7	11.9	99
GH-36224	715	313	25.5	GH-36225	44	8	12.7	-0.5	40	50.8	M10×1.5	35.75	15.8	70.1	21.3	137
GH-36202-MSS	STAINLESS STEEL															
GH-36204-MSS	STAINLESS STEEL															
GH-36224-MSS	STAINLESS STEEL															

GH-30290M AND GH-30292M

*Plunger Locks in Extended Position Only

手柄下压为锁紧状态

WEIGHT(重量) : 1270g


HOLDING CAPACITY(夹持力) : 295kg

HANDLE OPENS(手柄开启角度) : 45°

PLUNGER STROKE(行程) : 13mm



MODEL	DESCRIPTION
GH-30290M	FLANGED BASE
GH-30292M	STRAIGHT BASE

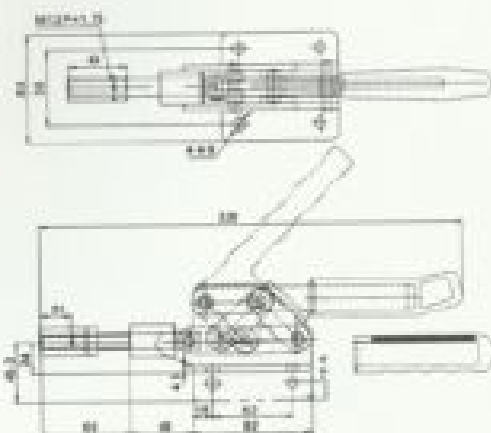



门扣式 Door latch

GH-36060

*Plunger Lock in Extended Position Only. 手柄下压为锁紧状态.

WEIGHT(自重) : 690g

HOLDING CAPACITY(夹持力) : 300kg


SPINDLE SUPPLIED(压头螺柱型号) : M8×30

HANDLE OPENS


(手柄开启角度) : 76°

PLUNGER STROKE

(行程) : 28mm

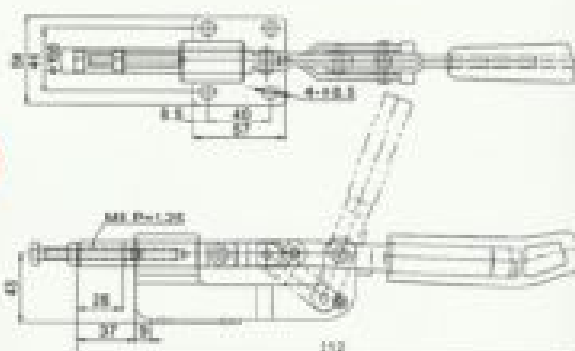

GH-40323 GH-431 GH-40341

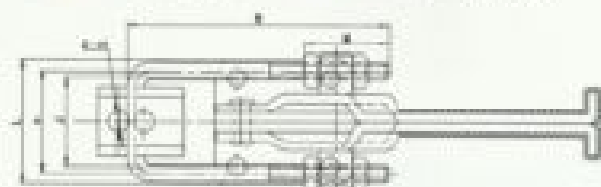

MODEL	WEIGHT(g)	SLT(mm)	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
GH-40323	37.6	143	5	10	20	3.2	15.9	26.2	4.4	3	4.4	19	15	28.2	24	38-50	29.3	75	M8P=0.7	12
GH-431	210	118	6.8	12	25.8	6.4	19	89.7	6.7	3	6.1	31.6	27	44.4	38	40-240	41.3	121.7	M8P=1	12.2
GH-40341	570	600	1.5	18.2	34.1	5.5	41.3	80.3	6.6	4	8.1	38.1	44.1	34	32	11.5-400	74	154.5	M8P=1.25	13.2
GH-40323-SS	STAINLESS STEEL																			
GH-431M-SS	STAINLESS STEEL																			
GH-40341-SS	STAINLESS STEEL																			

GH-40380 AND GH-40370-LP

*Forged alloy steel base GH-40380(底座为锻造合金钢)

*Optional latch plate available : GH-40370-LP


WEIGHT(自重) : 2000g

HOLDING CAPACITY(夹持力) : 3600kg

GH-40380-SS & LATCH PLATE

are stainless steel

GH-40380-U Bolt φ1/2

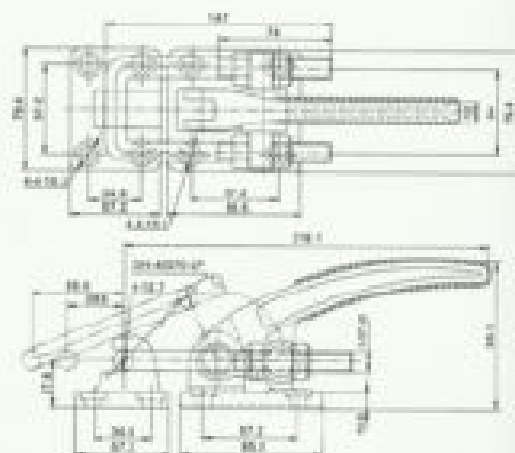


门扣式 Door latch




GH-40370 AND GH-40370-LP

*Forged alloy steel base(GH-40370 材质为锻造合金钢)
 *Optional latch plate available : GH-40370-LP
 WEIGHT(自重) : 1330g
 HOLDING CAPACITY(夹持力) : 180.8kg
 GH-40370-LP Ductukeron
 GH-40370-U Bolt ϕ 3/8

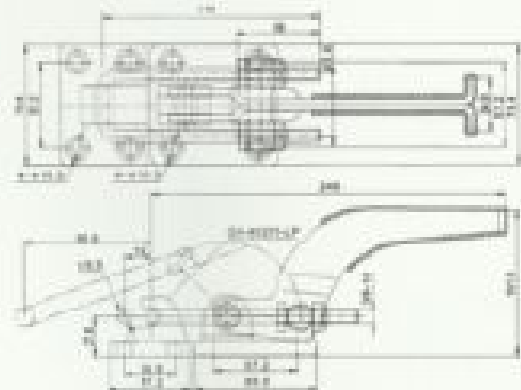


GH-40324 THRU GH-40344

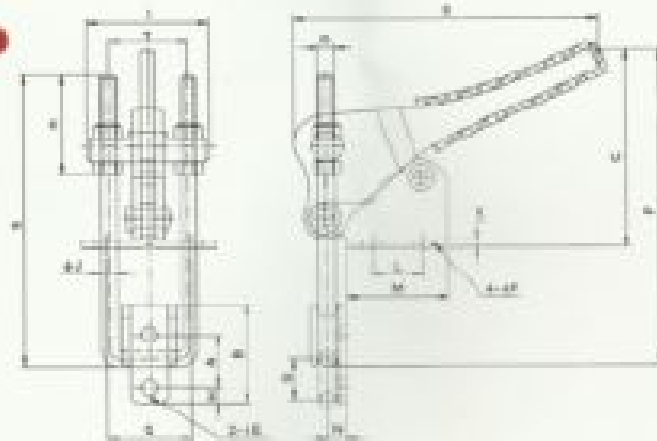

MODEL	WEIGHT(g)	HOLDING CAPACITY(kg)	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T
GH-40324	95.6	125	14.3	25.4	55.3	75	4.4	5.3	MSP=0.7	4	31	4	2	13	21	4.7	11.1	81	22	26.5	78.3	28.5
GH-40334	267	450	29.8	38.3	81.9	120	1.1	7.1	MSP=1	1.1	45.3	6.33	1	18.1	33.3	6.7	17.3	68.5	21.4	40.3	154	38
GH-40344	648	900	31	14	88.7	130.2	1.7	8.7	MSP=1.25	1.5	60.3	7.3	1	11.8	47.1	12.7	28.8	150	36.5	58	154	44.5
GH-40324-SS	STAINLESS STEEL																					
GH-40334-SS	STAINLESS STEEL																					
GH-40344-SS	STAINLESS STEEL																					

GH-43110 AND GH-43120

WEIGHT(自重) : 208g
 HOLDING CAPACITY(夹持力) : 170kg
 *GH-43110 Supplied with MSP=1.0 hook bolt
 *GH-43120 Supplied with GH-SA-065010 hex head spindle assembly

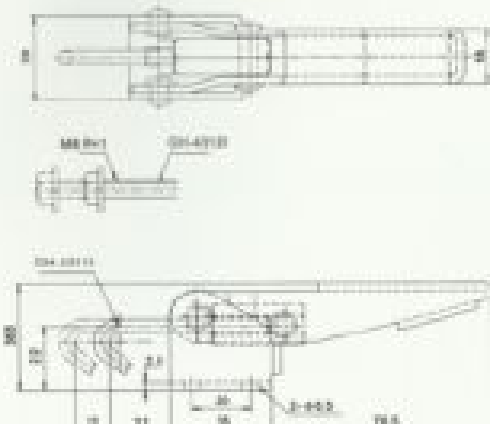

GH-70305, GH-70310, GH-70315, GH-70505, GH-70510
GH-70515, GH-70605, GH-70610, GH-70615

These heavy-duty clamps provide the strong and durable function to meet the requirement of high precision repeatability for car manufacturing industry. Drop forged parts are accurately machined and equipped with hardened pivot pins and bushings. The clamps are fitted with hardened and ground bushes and pivot pins.




GH-70305
GH-70505
GH-70605



GH-70310
GH-70510
GH-70610



GH-70315
GH-70515
GH-70615

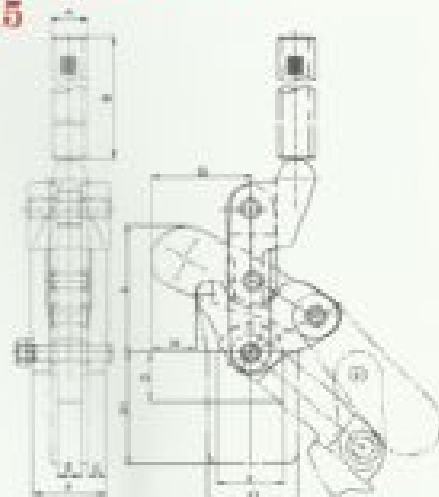

Model	Weight(g)	Holding Capacity(kg)	Adjusting	Adjusting Angle	GA	B	C	D	E	F	G	H	I	J
GH-70305	790	500	254°	114°	11.5	6.7	28	37	11.8	40	15	28	-	12
GH-70310	830													
GH-70315	940													
GH-70505	1368	1000	204°	130°	21.2	16	28	123	40.8	57	26	38	51	73
GH-70510	1490													
GH-70515	1590													
GH-70605	2104	2000	204°	130°	27	18.1	31	17	48.8	74.5	33	51	63.5	90
GH-70610	2670													
GH-70615	2990													

GH-702-C, GH-70201, GH-702-D, GH-70203, GH-702-K
GH-701-C, GH-70101, GH-701-D, GH-70103, GH-701-K

FIXED HANDLE HOLDER
(ONE PIECE FORGED)

FIXED HANDLE HOLDER
(ONE PIECE FORGED)



GH-702-C
GH-702-D
GH-702-K




GH-70201
GH-70203



GH-701-C
GH-701-D
GH-701-K



GH-70101
GH-70103

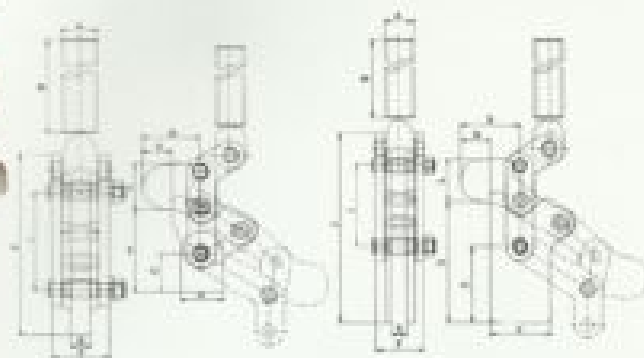

Model	Weight(g)	Holding Capacity(kg)	Adjusting	Adjusting Angle	GA	B	C	D	E	F	G	H	I	J
GH-702-C	180	500	150°	121°	17.3	23.8	41	8	31.8	40	27	10.8	31	36
GH-70201	1660													
GH-70203	1480													
GH-702-D	2550	1000	150°	128°	27.2	37.2	84	16	41	59	34.7	90	161	50
GH-702-K	2550													
GH-701-C	748													
GH-70101	700	500	150°	121°	17.3	30	75	8	32.8	40	27	50.8	121	44.5
GH-701-D	1680													
GH-701-K	1590													
GH-70103	1650	1000	150°	128°	27.2	80	120	16	41	59	34.7	90	160	50.5
GH-701-K	1650													



气压式 Pneumatic

GH-10101-A

This miniature clamps is air powered version of model GH-101-A. Supplied with GH-FC-14134 neoprene tipped spindle assembly.



GH-12050-A AND GH-12050-UA

Supplied with GH-FC-14134 neoprene tipped spindle assembly. Hold down bar open 95° to facilitate easy part loading and unloading.



GH-12130-A AND GH-12132-A

Accepts all 5/16-18 diameter spindles. Solid bar with bolt retainer, or U-bar with flanged washers is available. Bar opens 92°.



GH-12265-A AND GH-12275-A

Similar to series GH-12132-A. Accepts all 3/8-16 diameter spindles. Bar opens 95°.



GH-36003-A

The 11.1mm diameter plunger extends 19.35mm to a locked position. The end of the plunger is drilled and tapped for a M8 P1=1.25 spindle.



GH-36330-A

The 15.6mm diameter plunger travels forward 11.8mm from and open to a closed and locked position. Plunger is drilled and tapped to accept a M10P=1.5 spindle or to receive your custom fixture.



GH-305-EA

The 15.6mm diameter plunger travels forward 25.4mm from and open to a closed and positive locked position even if air pressure fails. Plunger accepts any M10P=1.5 spindle or to receive your custom fixture.



GH-10247-A AND GH-10249-A

Similar to preceding air-powered hold down action models. Accepts all 1/2" spindles. Bar opens 95°.

